

Lamp Watts	Base	½" Stem Mount ①	Yoke Mount ①
Metal Halide			
50	Medium	FLS50MH-120	FLS50MH-120-TRN
70	Medium	FLS70MH-120	FLS70MH-120-TRN
100	Medium	FLS100MH-120	FLS100MH-120-TRN
150	Medium	FLS150MH-120	FLS150MH-120-TRN
175	Medium	FLS175MH-120	FLS175MH-120-TRN

Lamp Watts	Base	½" Stem Mount ①	Yoke Mount ①
High Pressure Sodium			
35	Medium	FLS35HP-120NP	FLS35HP-120NP-TRN
50	Medium	FLS50HP-120NP	FLS50HP-120NP-TRN
70	Medium	FLS70HP-120NP	FLS70HP-120NP-TRN
100	Medium	FLS100HP-120NP	FLS100HP-120NP-TRN
150	Medium	FLS150HP-120NP	FLS150HP-120NP-TRN

HPS: 35-150W – 120V Reactor - High Power Factor replace 120 with -120R
120V, 277V or 347V replace 120NP with the required voltage


MH: 50-175W – 277V or 347V replace 120 with the required voltage

Options

To order add suffix	Suffix
Lamp With clear lamp	-L
Photocontrol	-PC
Distribution	
Narrow	MH 4X3 HPS 4X4
Medium	6X5 6X6
Wide	7X7 as listed

Accessories

Order separately	Catalogue #
Slipfitter Adapter Converts stem to slipfitter Tenon 2" - 3" IPS 2 3/8" - 3 1/2" OD	FLS-PTF
Vandal Shield Lexan	FLS-LS
Wire Guard	FLS-WG

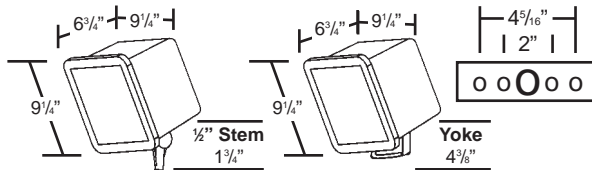

EPA
0.71 ft²
Includes 1.2 drag factor



FLS
35 watt thru 150 watt



Three beam Spreads for Metal Halide and High Pressure Sodium Lamps

With lamps from 35 to 175 watt, this compact low wattage floodlight is available for wide, medium or narrow distribution.

Construction

Heavy wall die cast aluminum housing.

Die cast aluminum hinged cover is secured with a single heavy duty 1/4"-20 cover bolt.

Flat tempered gasketed glass lens. Gasketing is long life silicone rubber.

Mounting

Choice of yoke, stem and stem with slipfitter mounting.

Socket

Specification grade porcelain lampholder.

Finish

Bronze polyester powder coat finish.

Ballasts

HPF ballasts are suitable low temperature starting. MH-30°C, HPS -40°C


Lamp Watts	Base	Catalogue # ①
Metal Halide		
50	Medium	AL50MH-120-FL
70	Medium	AL70MH-120 -FL
100	Medium	AL100MH-120 -FL

Lamp Watts	Base	Catalogue # ①
High Pressure Sodium		
35	Medium	AL35HP-120-FL
50	Medium	AL50HP-120-FL
70	Medium	AL70HP-120-FL
100	Medium	AL100HP-120-FL
150	Medium	AL150HP-120-FL

① 277V or 347V replace 120 with the required voltage

Options

To order add suffix	Suffix
Lamp With clear lamp	-L
Photocontrol	-PC
Wire Guard	-TP

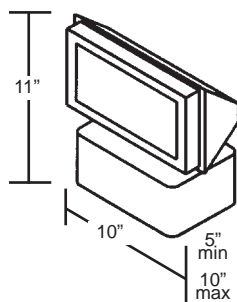

AL

35 to 150 Watt
Architectural Floodlight



Rugged Construction

Cast heavy wall aluminum housing with rugged two way swivel design allows the both left-right and up-down aiming.

Flat tempered gasketed glass lens.

Mounting

Choice of yoke, stem and stem with slipfitter mounting.

Socket

Specification grade porcelain lampholder.

Finish

Bronze polyester powder coat finish. Designer colours are available.

