

Tubular Quartz Infrared Lamps

Tubular quartz infrared heat lamps are designed for service other than illumination.

Unless otherwise noted,

1. Tubular quartz heat lamps should not be used in equipment where the seal temperatures exceed 650°F.
2. Operating position is HORIZONTAL.
3. R.S.C. Base = Recessed Single Contact

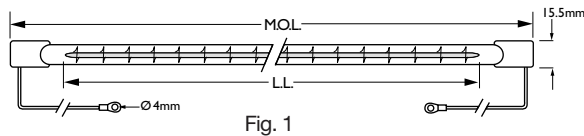


Fig. 1



Fig. 2



Fig. 3




Fig. 4

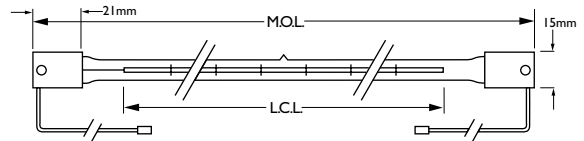


Fig. 5




Fig. 6




Fig. 7

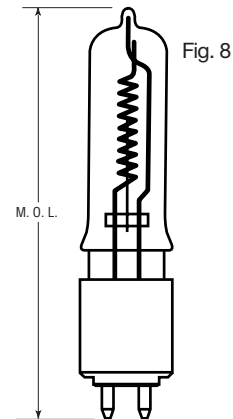


Fig. 8

Quartz Infrared Heat Lamps

Product Number	Description	Watts	Volts	Bulb	Base	Pkg. Qty.	Finish	Filament	L.L.		M.O.L.		Avg. Rated Life	Diam. (mm)	W/cm	Color Temp(K)	Burning Position	Fig. No.
									(In.)	(mm)	(In.)	(mm)						
20997-3	375T3/7	375	120	T-3	R7S	10	Trans.	C-8	5	127	8.6	217.6	5000	11	29.5	2500	Horiz. ± 15	2
21651-5	500T3	500	120	T-3	U	10	Trans.	C-8	5	127	8.8	223.8	5000	11	39.4	2500	Horiz. ± 15	6
20994-0	500T3/7	500	120	T-3	R7S	10	Trans.	C-8	5	127	8.6	217.6	5000	11	39.4	2500	Horiz. ± 15	2
21001-3	500T3/CL	500	120	T-3	U	10	Clear	C-8	5	127	8.8	223.8	5000	11	39.4	2500	Horiz. ± 15	6
31203-3	13169X	500	120	T-3	X	10	Clear	C-8	5.6	142	9.5	241	5000	11	35.2	2450	Horiz. ± 15	3
31207-4	13169Y	500	120	T-3	Y	10	Clear	C-8	5.6	142	8.6	218	5000	11	30.3	2450	Horiz. ± 15	7
31205-8	13169X/98(1)	500	120	T-3	X	10	Reflector	C-8	5.6	142	9.5	241	5000	11	35.2	2450	Horiz. ± 15	3
21680-4	800T3	800	120	T-3	U	10	Trans.	C-8	8	203	12	303	5000	11	39.4	2500	Horiz. ± 15	6
20995-7	1000T3	1000	240	T-3	U	10	Trans.	C-8	10	254	13.8	350.8	5000	11	39.4	2500	Horiz. ± 15	6
21000-5	1000T3/CL	1000	240	T-3	U	10	Clear	C-8	10	254	13.8	350.8	5000	11	39.4	2500	Horiz. ± 15	6
31213-2	13195X	1000	235	T-3	X	10	Clear	C-8	10.7	272	14.6	370	5000	11	36.8	2450	Horiz. ± 15	3
31225-6	13195Y	1000	235	T-3	Y	10	Clear	C-8	10.7	272	13.7	348	5000	11	36.8	2450	Horiz. ± 15	7
31267-8	13713Z/98(1)	1000	235	T-3	Z	10	Reflector	C-8	10.7	272	14	357.5	5000	11	36.8	2450	Universal	4
31260-3	13713X	1000	235	T-3	X	10	Clear	C-8	10.7	272	14.6	370	5000	11	36.8	2450	Universal	3
31216-5	13195X/98(1)	1000	235	T-3	SK15	10	Reflector	C-8	10.7	272	14.1	360	5000	11	36.8	2450	Horiz. ± 15	5
† 28050-3	1500T3	1000	235	T-3	SK15	10	HeLen	C-8	11	280	14.17	360	7000	9.6	35.7	2400	Horiz. ± 15	5
† 29107-0	6990P Long Life	1000	120		G9.5	10	Clear	CC-8	1.375	60.3	4	101	450	20		3100	UNIV	8

† New Since Last Printing

(1) Lamps have white reflective coating on bulb.