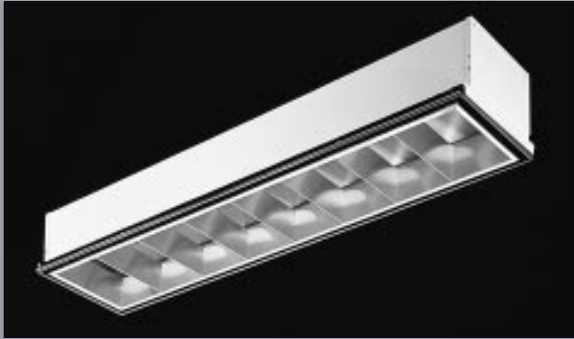


# 4PL



Maximum shielding for visual comfort.

4" deep cell parabolic semi-specular aluminum louver. Interlocked mitered corners.

Air functions, air supply / return, static, or heat removal.




Air control blades available as an option for cold air handling units.

Louver is retained with T hinges and spring loaded cam latches.

Steel housing. Baked white polyester powder finish.

10

## 1' x 4'

T-GRID CEILING	AIR FUNCTION	LAMPS	CAT. NO.	VOLTS*	BALLAST*
 <p>1 x 8 8 CELLS</p>	AIR SUPPLY / RETURN	1-32 W/T8	<b>4PLA-14G-132-8-</b>	120	ES
	STATIC	"	<b>4PLS-14G-132-8-</b>	120	ES
	HEAT REMOVAL	"	<b>4PLH-14G-132-8-</b>	120	ES
 <p>1 x 8 8 CELLS</p>	AIR SUPPLY / RETURN	1-40 W/T12	<b>4PLA-14G-140-8-</b>	120	ES
	STATIC	"	<b>4PLS-14G-140-8-</b>	120	ES
	HEAT REMOVAL	"	<b>4PLH-14G-140-8-</b>	120	ES
 <p>2 x 8 16 CELLS</p>	AIR SUPPLY / RETURN	2-32 W/T8	<b>4PLA-14G-232-16-</b>	120	ES
	STATIC	"	<b>4PLS-14G-232-16-</b>	120	ES
	HEAT REMOVAL	"	<b>4PLH-14G-232-16-</b>	120	ES
<p>2 x 8 16 CELLS</p>	AIR SUPPLY / RETURN	2-40 W/T12	<b>4PLA-14G-240-16-</b>	120	ES
	STATIC	"	<b>4PLS-14G-240-16-</b>	120	ES
	HEAT REMOVAL	"	<b>4PLH-14G-240-16-</b>	120	ES

> For other ceiling type see catalog numbering code on PAGE 16, or consult factory.  
 > Air control / damper blades are available as an option.

\* For other volts and ballast selection = SEE PAGE 16  
 ORDERING EX: CAT. NO. = 4PLA-14G-240-16-120-ES