

CL



Aesthetically pleasing and functional luminaire for 30" x 30" ceiling grid.

Black perimeter reveal simulates a floating framed diffuser.



Extruded aluminum frames are retained with pull down torsion springs.

Air handling capabilities, supply / return, or static.

Multiple options available, in lamps, ballast, louvers, and frames.




Steel housing, baked white finish.

30" x 30"

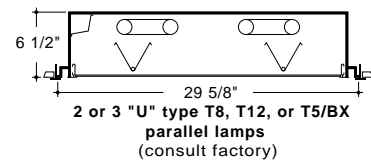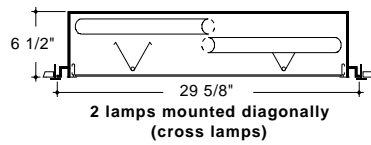

AIR FUNCTIONS	FRAME	LAMPS	CAT. NO.	VOLTS*	BALLAST*
STATIC	FLUSH	2-25 W/T8	CLSF-30-225-12-	120	ES
	FLUSH	2-30 W/T12	CLSF-30-230-12-	120	ES
	REGRESSED 45°	2-25 W/T8	CLSRs-30-225-12-	120	ES
	REGRESSED 45°	2-30 W/T12	CLSRs-30-230-12-	120	ES
	REGRESSED 90°	2-25 W/T8	CLSRV-30-225-12-	120	ES
	REGRESSED 90°	2-30 W/T12	CLSRV-30-230-12-	120	ES
AIR SUPPLY / RETURN	FLUSH	2-25 W/T8	CLAF-30-225-12-	120	ES
	FLUSH	2-30 W/T12	CLAF-30-230-12-	120	ES
	REGRESSED 45°	2-25 W/T8	CLARS-30-225-12-	120	ES
	REGRESSED 45°	2-30 W/T12	CLARS-30-230-12-	120	ES
	REGRESSED 90°	2-25 W/T8	CLARV-30-225-12-	120	ES
	REGRESSED 90°	2-30 W/T12	CLARV-30-230-12-	120	ES

EXTRUDED ALUMINUM FRAMES:

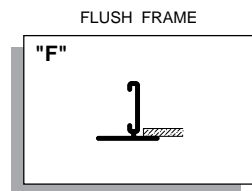

*VOLTS | *BALLAST
 120 | ES = ENERGY SAVING
 277 | EL = ELECTRONIC
 347 |

HT SPECULAR
see page 17

ORDERING EX: CAT. NO. = CLAF-30-230-12-120-ES