


# LSSG-LSHOG

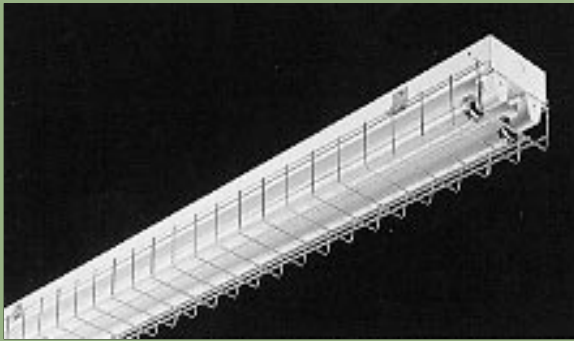

General purpose strip lighting.

Rapid start HO 800 MA. - Slimline 425 MA.

Individual or tandem wired, 4' to 16'.

End plates serve as connectors for continuous row mounting.

Suitable for surface, stem, or chain mounting.

Baked white enamel finish.

Zinc plated wire guard.

68

SLIMLINE	LAMPS	LENGTH	CAT. NO.	VOLTS*	BALLAST*
	1-75 W/T12/SL	8'	<b>LSSG-8-175-</b>	120	STD
	2-75 W/T12/SL (tandem)	16'	<b>LSSG-16-275-</b>	120	ES
	2-75 W/T12/SL	8'	<b>LSSG-8-275-</b>	120	ES
	<b>HIGH OUTPUT</b>				
	1-60 W/T12/HO	4'	<b>LSHOG-4-160-</b>	120	STD
	2-60 W/T12/HO (tandem)	8'	<b>LSHOG-8-260-</b>	120	STD
	1-110 W/T12/HO	8'	<b>LSHOG-8-1110-</b>	120	STD
	2-110 W/T12/HO (tandem)	16'	<b>LSHOG-16-2110-</b>	120	ES
	2-60 W/T12/HO	4'	<b>LSHOG-4-260-</b>	120	STD
	2-110 W/T12/HO	8'	<b>LSHOG-8-2110-</b>	120	ES

*VOLTS	*BALLAST
120	ES = ENERGY SAVING
277	EL = ELECTRONIC
347	STD = STANDARD

ORDERING EX: CAT. NO. = **LSSG-8-275-120-ES**