


GE
Lighting Solutions

Decorative Post Top Lighting

StreetDreams™ Lenoir (LENX & LENF)

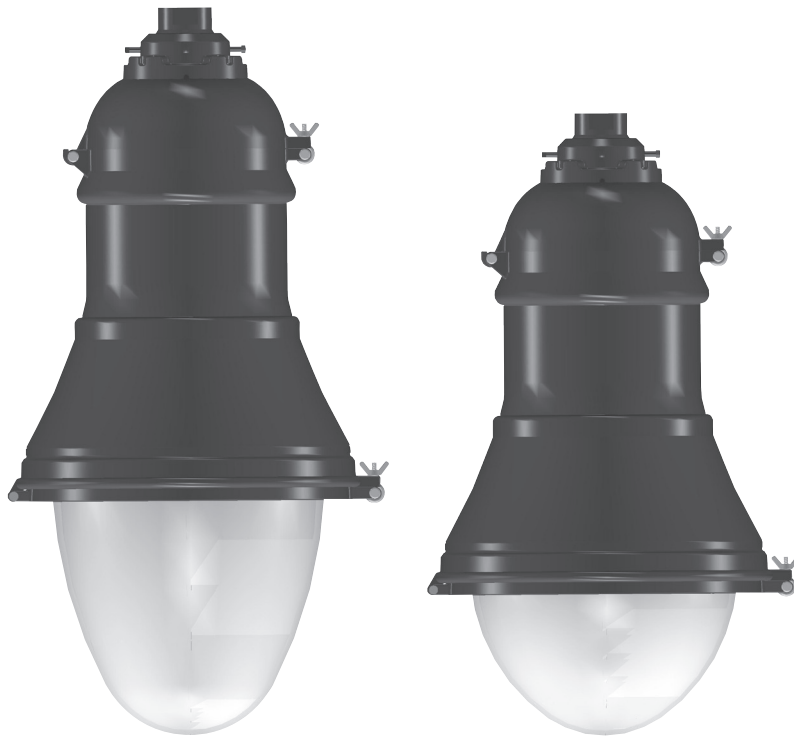

imagination at work

Product Features

GE offers a variety of decorative Post Top and Pendant Mount Lighting solutions that range from the nostalgic looks of yesterday to the sleek, modern designs of today, providing style and elegance to downtown areas, commercial developments, parks and residential communities..

Applications

- Residential roadway, walkways, historic urban settings, shopping centers, malls, plazas and parks

Finish

- Powder painted with choice of 188 colors

Ratings

-   1598 Listed

Mounting


- Several Mounting Options

Unique Features

- Tool-less access to lamp, ignitor and ballast
- Multiple finial choices
- Textured, prismatic glass offered in two sizes
- Medium and mogul base sockets available
- Full size PE available
- Terminal board standard
- Shielding available
- Flex adapter allows $\pm 10^\circ$ vertical leveling, 360° horizontal rotation
- Channeling to prevent water ingress

Accessories

Fixture Dimensions - All shown with Flex Mount

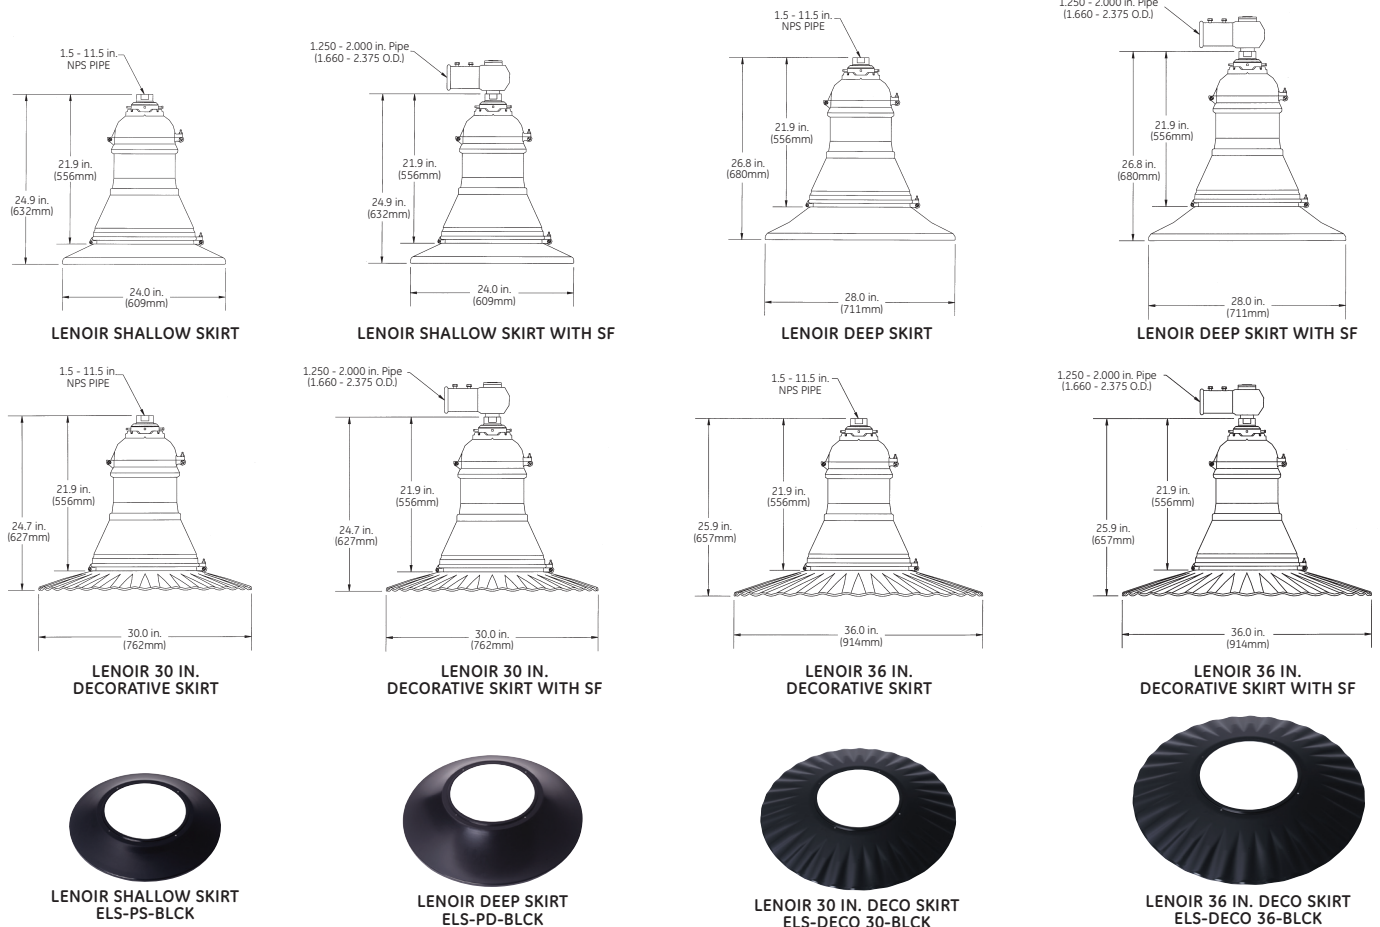

Ordering Number Logic

StreetDreams™ Lenoir (LENX & LENF)



No Finial, PE Optional

PROD. ID	GLOBE	DISTRIBUTION	WATTAGE	LIGHT SOURCE	VOLTAGE	BALLAST TYPE	MOUNTING	PE FUNCTION	FINIAL	SHIELDING	COLOR	OPTIONS
LENX = Lenoir/ No Finial/ PE on arm only	G = Shallow Globe L = Long Glass S = Short Glass	A = Asymmetric B = Symmetric	05 = 50 07 = 70 10 = 100 15 = 150 25 = 250 40 = 400	E = Energy Act Compliant Pulse MH (EPMH) S = HPS P = PMH	0 = Multi 1 = 120 2 = 280 3 = 240 4 = 277 5 = 480 C = 120x 240x 277 D = 347 F = 120X 347	A = Autoreg H = HPF REAC. or LAG N = NPF REAC. or LAG	1 = 1.5" Rigid* Mount 2 = 1.5" Flex* Mount 3 = Arm + Flex** Mount (No PE) Finial Available 4 = Arm + Rigid*** Mount (No PE) Finial Available 5 = Arm + Rigid* Mount No Finial 6 = Arm + Flex* Mount No Finial PE available with arm mounting only	1 = None 2 = External PE* receptacle 4 = External PE* receptacle with Shorting Cap 5 = External PE* receptacle with PE Control 6 = Internal PE*** receptacle 7 = Internal PE*** receptacle with Shorting Cap 8 = Internal PE*** receptacle with PE Control PE available with arm mounting only	X = None A = Silhouette B = Acorn C = Fleur-De-Lis D = Filagree E = Blossom F = Spike H = Steeple J = Gothic	0 = None 2 = Shallow Skirt 3 = Deep Skirt 4 = 30" Decorative Skirt 5 = 36" Decorative Skirt	AL = Aluminum BL = Black CG = Charcoal Gray DB = Dark Bronze GR = Gray FG = Forest Green XX = Special	F = Fused
LENF = Lenoir/ No PE, Arm mount only												
LENI = with internal PE receptacle												
NOTES: * Available with LENX only ** Available with LENF only *** Available with LENI only												


Ballast Selection Table

		Ballast Type/ Voltage				
		60 Hz				
Wattage	Light Source	120X208X 240X277	120X240X 277	120	480	347 120 x 347
50	HPS	H,N	N/A	H,N	N/A	H,N
70	HPS	A,H,N	N/A	A,H,N	H,N	H,N
100	HPS	A,H,N	N/A	A,H,N	H,N	H,N
150 (55v)	HPS	A,H,N	N/A	A,H,N	H,N	H,N
250	HPS	A	N/A	A	A	A
400	HPS	A	N/A	A	A	A
70	PMH	H,N	N/A	H,N	H,N	N/A
100	PMH	H,N	N/A	H,N	H,N	H,N
150	PMH	N/A	H	H,A	N/A	H
250	EPMH	A	N/A	A	A	A
400	EPMH	A	N/A	A	A	A

Photometric Selection Table


Wattage	Light Source	Symmetric Long	Symmetric Short	Asymmetric Long	Asymmetric Short
50	HPS	453502	453519	453538	453550
70	HPS	453503	453514	453539	453551
100	HPS	453504	453515	453540	453552
150 (55v)	HPS	453505	453516	453541	453553
250	HPS	453506	453517	453542	453554
400	HPS	453507	453518	453543	453555
70	PMH	453508	453520	453544	453556
100	PMH	453509	453521	453545	453557
250	EPMH	453512	453524	453548	453560
400	EPMH	453513	453525	453549	453561

Bracket dimensions and decorative finials

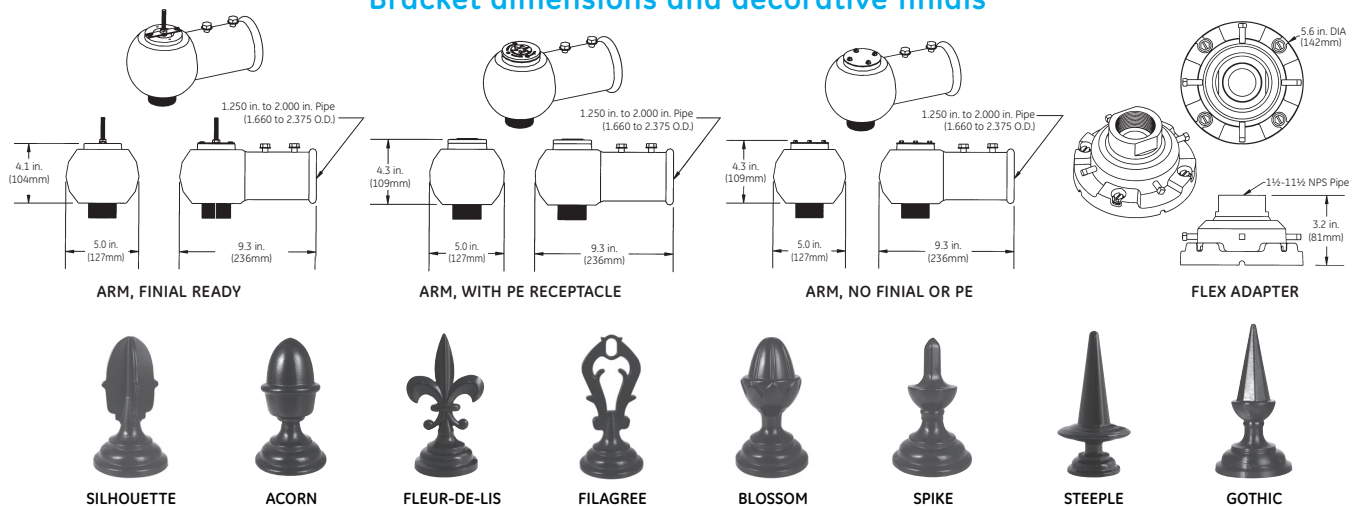


Product Dimensions


All shown with Flex Mount

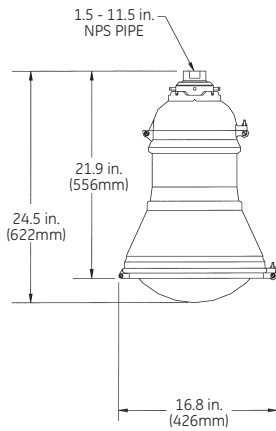


**LENOIR
SHALLOW GLASS**

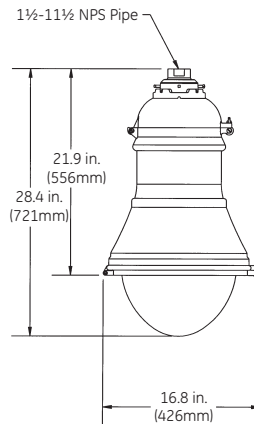


**LENOIR WITH
SHORT GLASS**

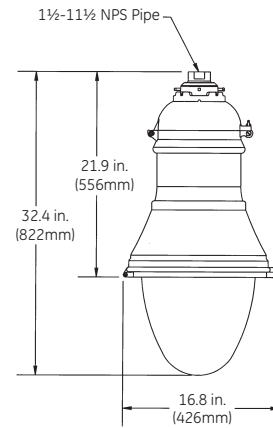


**LENOIR WITH
LONG GLASS**

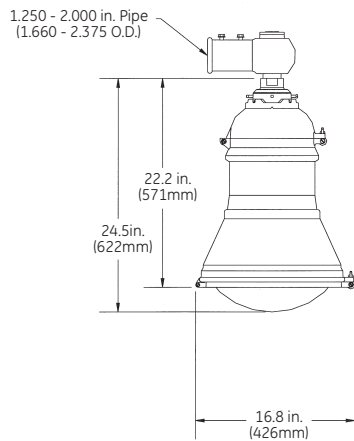

**LENOIR WITH ARM
AND SHALLOW GLASS**

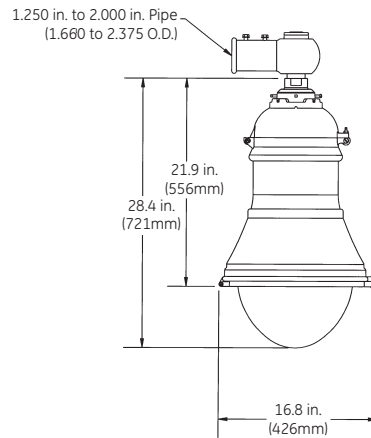

**LENOIR WITH ARM
AND SHORT GLASS**

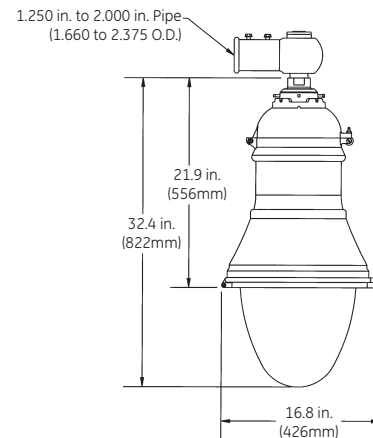

**LENOIR WITH ARM
AND LONG GLASS**

DATA

- Approximate Net Weight: Short - 57 lbs (25.9 kgs)
Long - 61 lbs (27.7 kgs)
- Suggested Mounting Height: 12-40 ft. (4-12 M)
- Effective Projected Area: Short - 1.0 sq ft max (.09 sq M max)
Long - 1.2 sq ft max (.11 sq M max)



GE Lighting Solutions • 1-888-MY-GE-LED • www.gelightingsolutions.com

1-888-69-43-533

GE Lighting Solutions, LLC is a subsidiary of the General Electric Company. The GE brand and logo are trademarks of the General Electric Company.
© 2012 GE Lighting Solutions, LLC. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.