

# HC40 Series




METER  
SOCKETS

## 200 AMP - MULTI POSITION 400 Amp Main c/w Blank Compartment

CATALOGUE #	TYPE	DESCRIPTION	DIMENSIONS (IN.)			WEIGHT
			H	W	D	
HC42R	O/H & U/G	2 gang, 400 Amp main, 200 Amp per position	22 <sup>13</sup> / <sub>16</sub>	27 <sup>13</sup> / <sub>16</sub>	6 <sup>1</sup> / <sub>8</sub>	48 lbs.
HC43R	O/H & U/G	3 gang, 400 Amp main, 200 Amp per position	22 <sup>13</sup> / <sub>16</sub>	37 <sup>1</sup> / <sub>16</sub>	6 <sup>1</sup> / <sub>8</sub>	65 lbs.
HC44R	O/H & U/G	4 gang, 400 Amp main, 200 Amp per position	22 <sup>13</sup> / <sub>16</sub>	46 <sup>5</sup> / <sub>16</sub>	6 <sup>1</sup> / <sub>8</sub>	83 lbs.
HC45R	O/H & U/G	5 gang, 400 Amp main, 200 Amp per position	22 <sup>13</sup> / <sub>16</sub>	55 <sup>9</sup> / <sub>16</sub>	6 <sup>1</sup> / <sub>8</sub>	103 lbs.
HC46R	O/H & U/G	6 gang, 400 Amp main, 200 Amp per position	22 <sup>13</sup> / <sub>16</sub>	64 <sup>13</sup> / <sub>16</sub>	6 <sup>1</sup> / <sub>8</sub>	121 lbs.

- Double entrance holes (top)
- Factory Bussed 400 Amp Mains
- 200 Amp, 600 VOLT per position
- 2 - 6 position horizontal
- 4 Jaw meter sockets
- CSA weatherproof enclosure 3R
- Approved conductor range:  
Line 1 No. 2 - 600 MCM CU/AL  
or two - 1/0 - 250 MCM CU/AL  
Load No. 6 - 250 MCM CU/AL
- May be field converted for use with single stud 500 mcm

- For overhead order **HD** series hub separate
- Add suffix "H" for right hand entry
- Approved for overhead & underground installations
- Use **SXK503** for 5th jaw at 9 O'clock

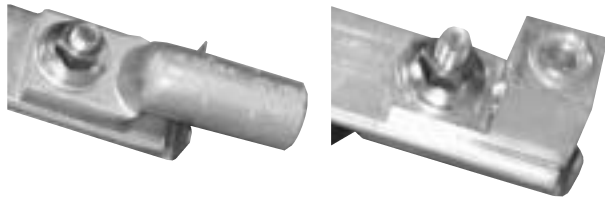

KNOCKOUT CODE	CONDUIT SIZE
G	1 <sup>1</sup> / <sub>4</sub> ", 1 <sup>1</sup> / <sub>2</sub> ", 2", 2 <sup>1</sup> / <sub>2</sub> "
S	3", 3 <sup>1</sup> / <sub>2</sub> ", 4"
AA	1 <sup>1</sup> / <sub>2</sub> "

