




LED COMMERCIAL STRIP

20W / 2FT / 120-277V

#CS2-202-4

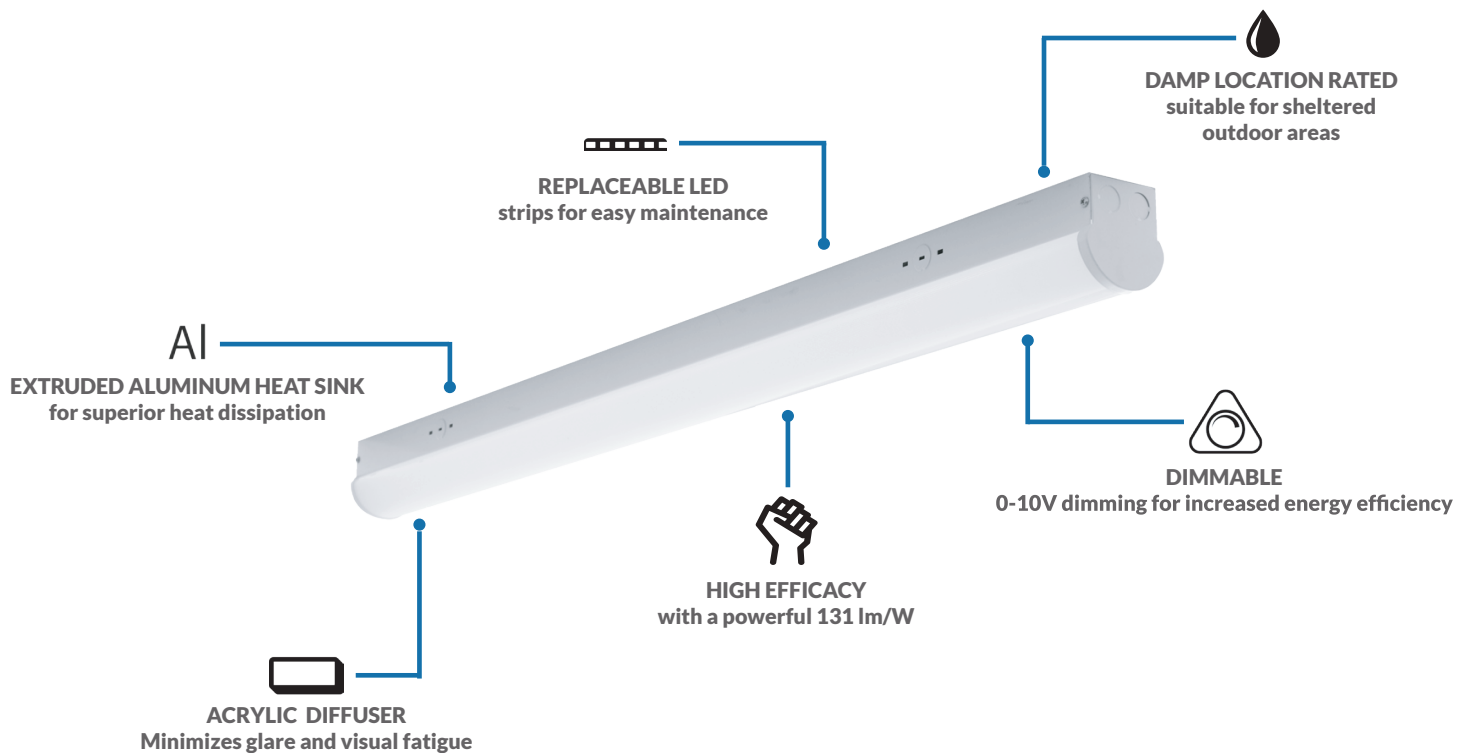

**10 YEAR
WARRANTY**

DESCRIPTION

The CS2 Series Commercial Strip fixtures are ideal for use in stairwells, common areas, and utility rooms. Its acrylic diffuser provides even, low glare light, and its exceptionally long life reduces maintenance costs. With 0-10V dimming and a high efficacy that meets today's stringent standards, these fixtures are the best solution if you are looking for dependable illumination in commercial conditions that bring maximum energy savings. Installation options include ceiling and wall mounting, making it versatile for any application.

POPULAR APPLICATIONS



STAIRWAYS






COMMON AREAS



UTILITY ROOMS

PRODUCT DIMENSIONS / PHOTOMETRIC SPECS / ILLUMINANCE AT A DISTANCE

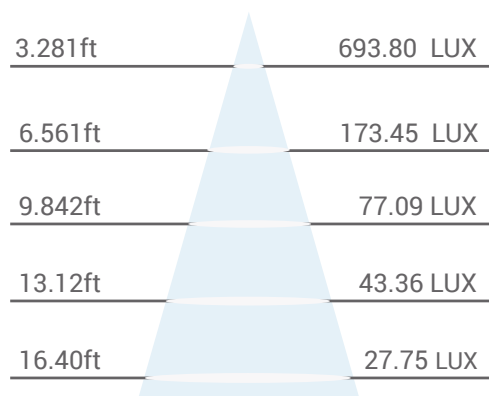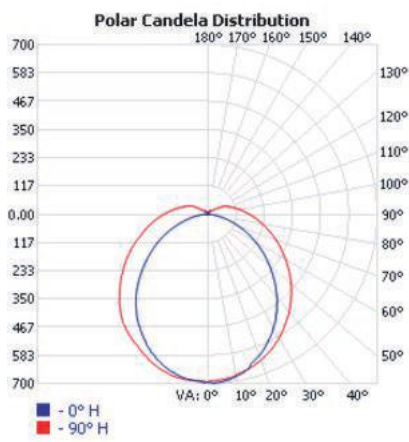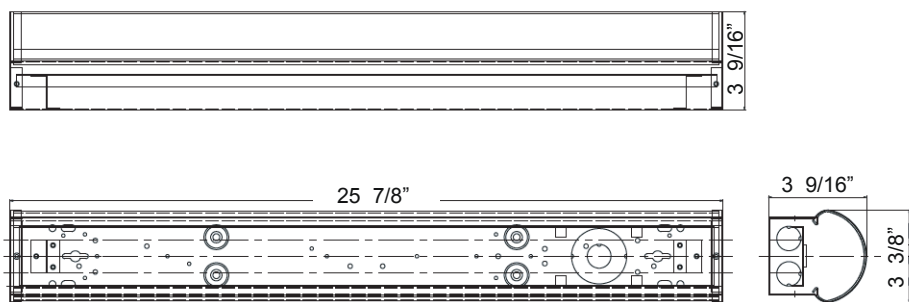

TECHNICAL DATA

LIGHT SPECIFICATIONS		ELECTRICAL		TEMPERATURE	
Lumens	2,600	Wattage	20W	Minimum Start	-20°C
Efficacy	131 lm/W	System Watts	18W	Ambient Temp	50°C
CCT	4000K	Input Voltage	120-277V	DIMENSIONS & WEIGHT	
CRI	≥80	THD	<20%	Dimensions	25 7/8" x 3 3/8" x 3 9/16"
Replaces	1 X 2-FOOT T8 FIXTURE	Power Factor	0.90	Weight	1.5 KGS
Dimmable	0-10V	CONSTRUCTION		APPROVALS & LISTINGS	
DRIVER		Housing Material	Powder Coated Galvanized Steel	cUL	IFAM7.E473127
Driver Type	Constant Current	Lens Material	Acrylic (PMMA)	DLC Listed	P34YD42X
Driver Output	24-45V	Damp Location Rated	Yes	IESNA	LM-79 & LM-80
Class 2 Driver	UL1310 Class 2	LED CHIP			
HOURS		Chip Brand	SEOUL SEMICONDUCTOR		
Rated Hours	50,000	Chip Type	SMD 3528		